

VISTA


FLAME RETARDANT ALLUSION FABRICS

VISTA



SNOW

40mm 1720290K

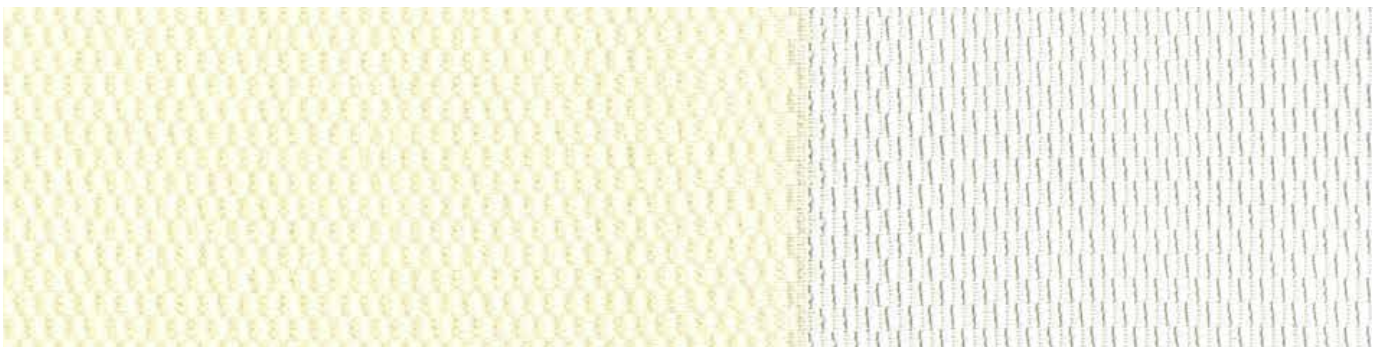


CALICO

40mm 1720441K



CINDER

40mm 1720918K

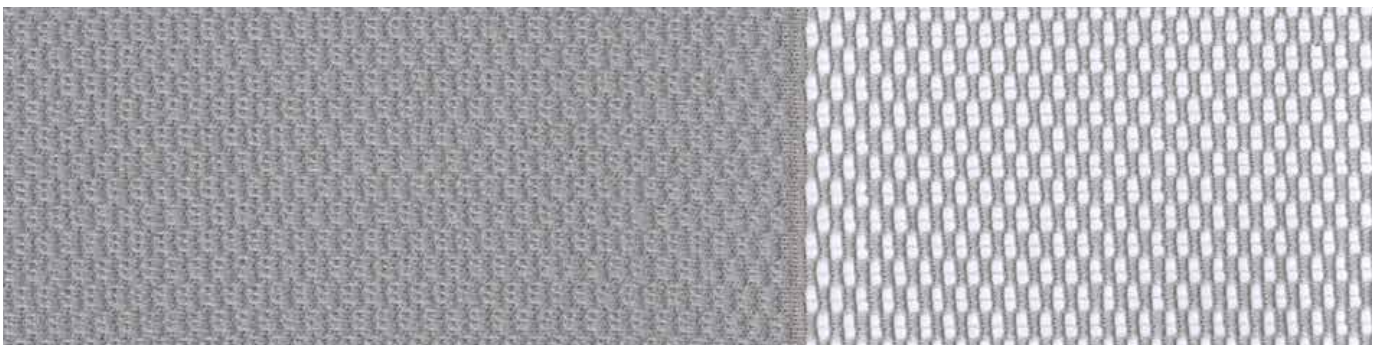

NORDIC

40mm 1720998K

LARGE

INSTALLATION APPEAL


DYNAMIC

LIGHT CONTROL

Specifications	Vista
Colour Range	4
Dim Out	Sheer/Light Filtering
Composition	100% Recycled Polyester
Exterior Colour	Self-coloured
Allusion Louvre Width	40mm
Allusion Roll Length	55m
Weight	185g/m ²
Thickness	0.75mm
Blind Type	Allusion
Colour Fastness (scale of 8)	7-8 - BS EN ISO 105-B02-2014
Flammability Standard	BS 5867 Part 2 Type B
Environmental Certification	OEKO-TEX® STeP
	Greenshield - VOC Safe Fabrics
Cleaning	Not suitable for cleaning with a damp or wet cloth.

Solar, Optical & Colour Fastness Properties

	Solar			Visual			UV Block	CF	DP	SC - EN 14501					Gtot				
	R _s	A _s	T _s	R _v	A _v	T _v				A	B	C	D	E	A	B	C	D	E
Calico	72	6	21	75	8	23	91	7	0	0.37	0.39	0.39	0.28	0.38	0.32	0.34	0.34	0.25	0.33
Cinder	66	18	15	59	32	10	94	7	0	0.41	0.43	0.42	0.29	0.40	0.35	0.37	0.36	0.25	0.35
Nordic	55	29	16	40	53	7	97	8	0	0.47	0.49	0.45	0.30	0.44	0.41	0.42	0.39	0.26	0.38
Snow	77	2	21	80	0	22	92	7	0	0.33	0.36	0.37	0.28	0.36	0.29	0.31	0.32	0.24	0.32



Solar Gain: The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and the proportion of energy which is absorbed by the window.

R: % of reflected heat and light.
A: % of absorbed heat and light.
T: % of transmitted heat and light.
UV Block: the % of UV light blocked by the fabric.

Colour Fastness (CF): Scale of 8, BS EN ISO 105-B02-2014.
Darkening Performance (DP): Scale of 0-4. 0: lowest opacity 4: highest. A rating of 4 indicates the product is completely opaque with no pinholes or light transfer.

Shading Co-efficient (SC): The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, the higher the efficiency of the fabric.
Gtot: Amount of heat entering through the glazing and shading combined.

Glazing system (EN 410)
A: Clear Single Glazing.
B: Clear Double Glazing.
C: Clear Double Glazing Low Emissivity.
D: Solar Control Double Glazing Low Emissivity.
E: Triple Glazing.

VISTA

