


GUARDIAN

FLAME RETARDANT FABRICS

GUARDIAN

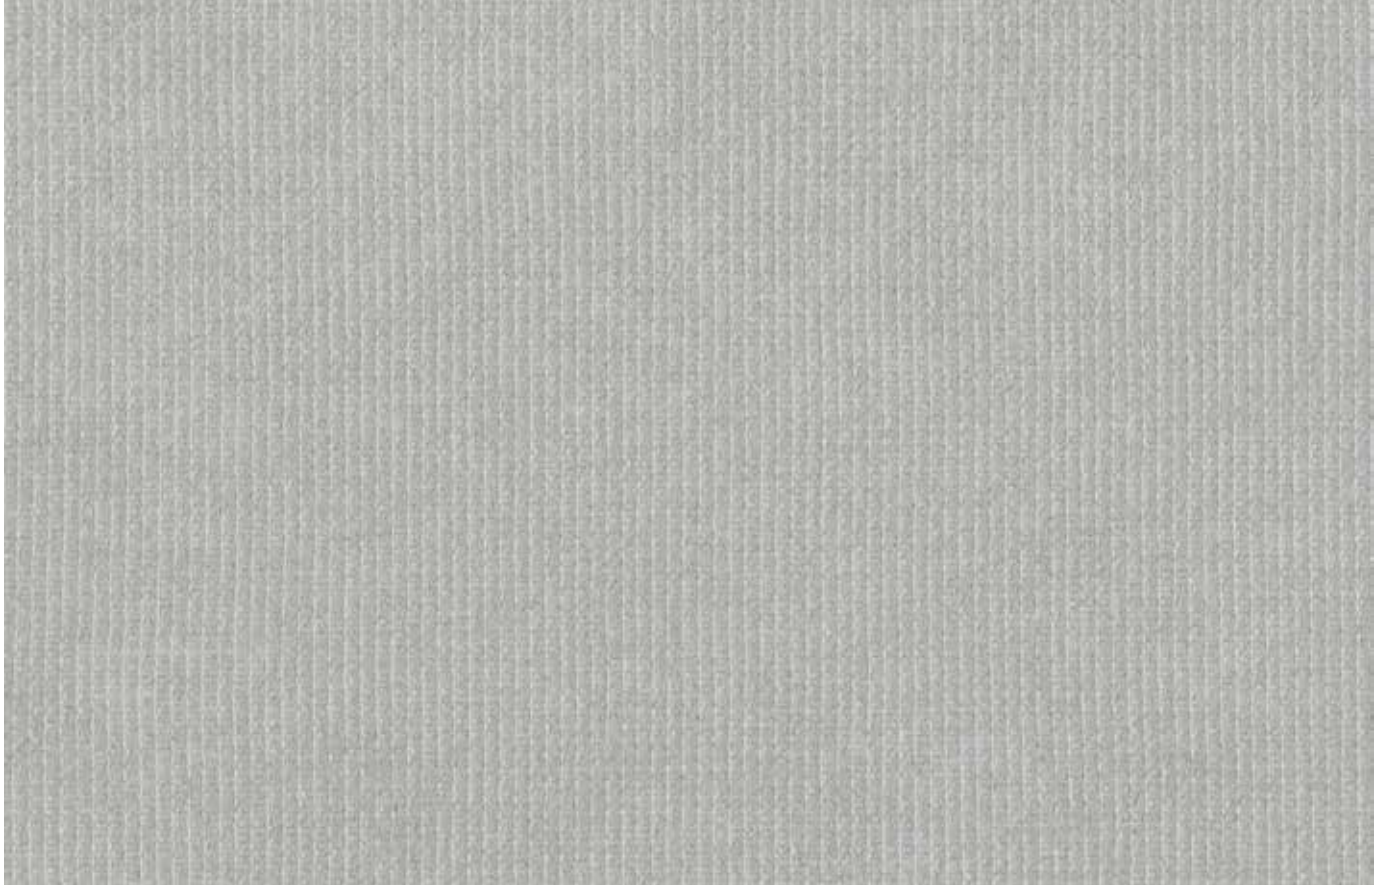

FLINT




WHITE

2m 1948900A
89mm 1948900D
127mm 1948900B



SILVER

2m 1948990A
89mm 1948990D
127mm 1948990B



FLINT

2m 1948492A
89mm 1948492D
127mm 1948492B



CHARCOAL

2m 1948298A
89mm 1948298D
127mm 1948298B



CHALK

2m 1948113A
89mm 1948113D
127mm 1948113B



PARCHMENT

2m 1948712A
89mm 1948712D
127mm 1948712B



ROYAL BLUE

2m 1948880A
89mm 1948880D
127mm 1948880B



JET BLACK

2m 1948599A
89mm 1948599D
127mm 1948599B

WIPE CLEAN & ULTRA-FRESH

ROLLER & VERTICAL


SPC OPTION AVAILABLE

Specifications	Guardian
Colour Range	8
Dim Out	Light Filtering
Composition	100% Polyester
Exterior Colour	Self-coloured
Roller Width	2m
Roller Roll Length	20m
Vertical Louvre Widths	89mm, 127mm
Vertical Roll Length	100m
Weight	300g/m ²
Thickness	0.76mm
Blind Types	Roller, Panel, Vertical
Colour Fastness (scale of 8)	6-8 - BS EN ISO 105-B02-2014
Flammability Standard	BS 5867 Part 2 Type B
Environmental Certification	OEKO-TEX® STeP Greenshield - VOC Safe Fabrics
Bacteria & Fungal Resistant	ASTM G21, Ultra-Fresh*
Cleaning	Gently wipe clean with a soft, damp cloth. Allow to dry in down position.

*Ultra-Fresh is a registered trademark of Microban Products Company

Solar, Optical & Colour Fastness Properties

	Solar			Visual			UV Block	CF	DP	SC - EN 14501					Gtot				
	R _S	A _S	T _S	R _V	A _V	T _V				A	B	C	D	E	A	B	C	D	E
Chalk	75	11	14	82	6	12	100	7	0	0.33	0.37	0.37	0.28	0.37	0.29	0.32	0.33	0.24	0.32
Charcoal	41	53	6	15	85	0	100	6	0	0.55	0.56	0.50	0.31	0.48	0.48	0.49	0.44	0.27	0.42
Flint	56	36	7	41	59	0	100	7	0	0.45	0.47	0.44	0.30	0.43	0.39	0.41	0.39	0.26	0.37
Jet Black	33	63	4	7	93	0	100	7	0	0.61	0.61	0.53	0.32	0.51	0.53	0.53	0.46	0.28	0.44
Parchment	64	28	9	58	40	3	100	6	0	0.40	0.43	0.42	0.29	0.41	0.35	0.37	0.36	0.25	0.35
Royal Blue	37	57	6	11	90	0	100	7	0	0.58	0.58	0.51	0.32	0.49	0.50	0.51	0.45	0.28	0.43
Silver	53	44	4	54	44	2	100	8	0	0.47	0.49	0.46	0.30	0.44	0.41	0.43	0.40	0.26	0.38
White	78	9	13	85	4	11	100	6	0	0.32	0.35	0.36	0.28	0.36	0.28	0.30	0.32	0.24	0.31



Solar Gain: The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and the proportion of energy which is absorbed by the window.

R: % of reflected heat and light.
A: % of absorbed heat and light.
T: % of transmitted heat and light.
UV Block: the % of UV light blocked by the fabric.

Colour Fastness (CF): Scale of 8, BS EN ISO 105-B02-2014.
Darkening Performance (DP): Scale of 0-4. 0: lowest opacity 4: highest. A rating of 4 indicates the product is completely opaque with no pinholes or light transfer.

Shading Co-efficient (SC): The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, the higher the efficiency of the fabric.
Gtot: Amount of heat entering through the glazing and shading combined.

Glazing system (EN 410)
A: Clear Single Glazing.
B: Clear Double Glazing.
C: Clear Double Glazing Low Emissivity.
D: Solar Control Double Glazing Low Emissivity.
E: Triple Glazing.

GUARDIAN

